


M* = Lavakiinnikkeen pohjaan/To the bottom of the body bracket.
N* = Lavakiinnikkeen pohjasta z-palkin pohjaan/
From the bottom of the body bracket to the bottom of the z-beam.

Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

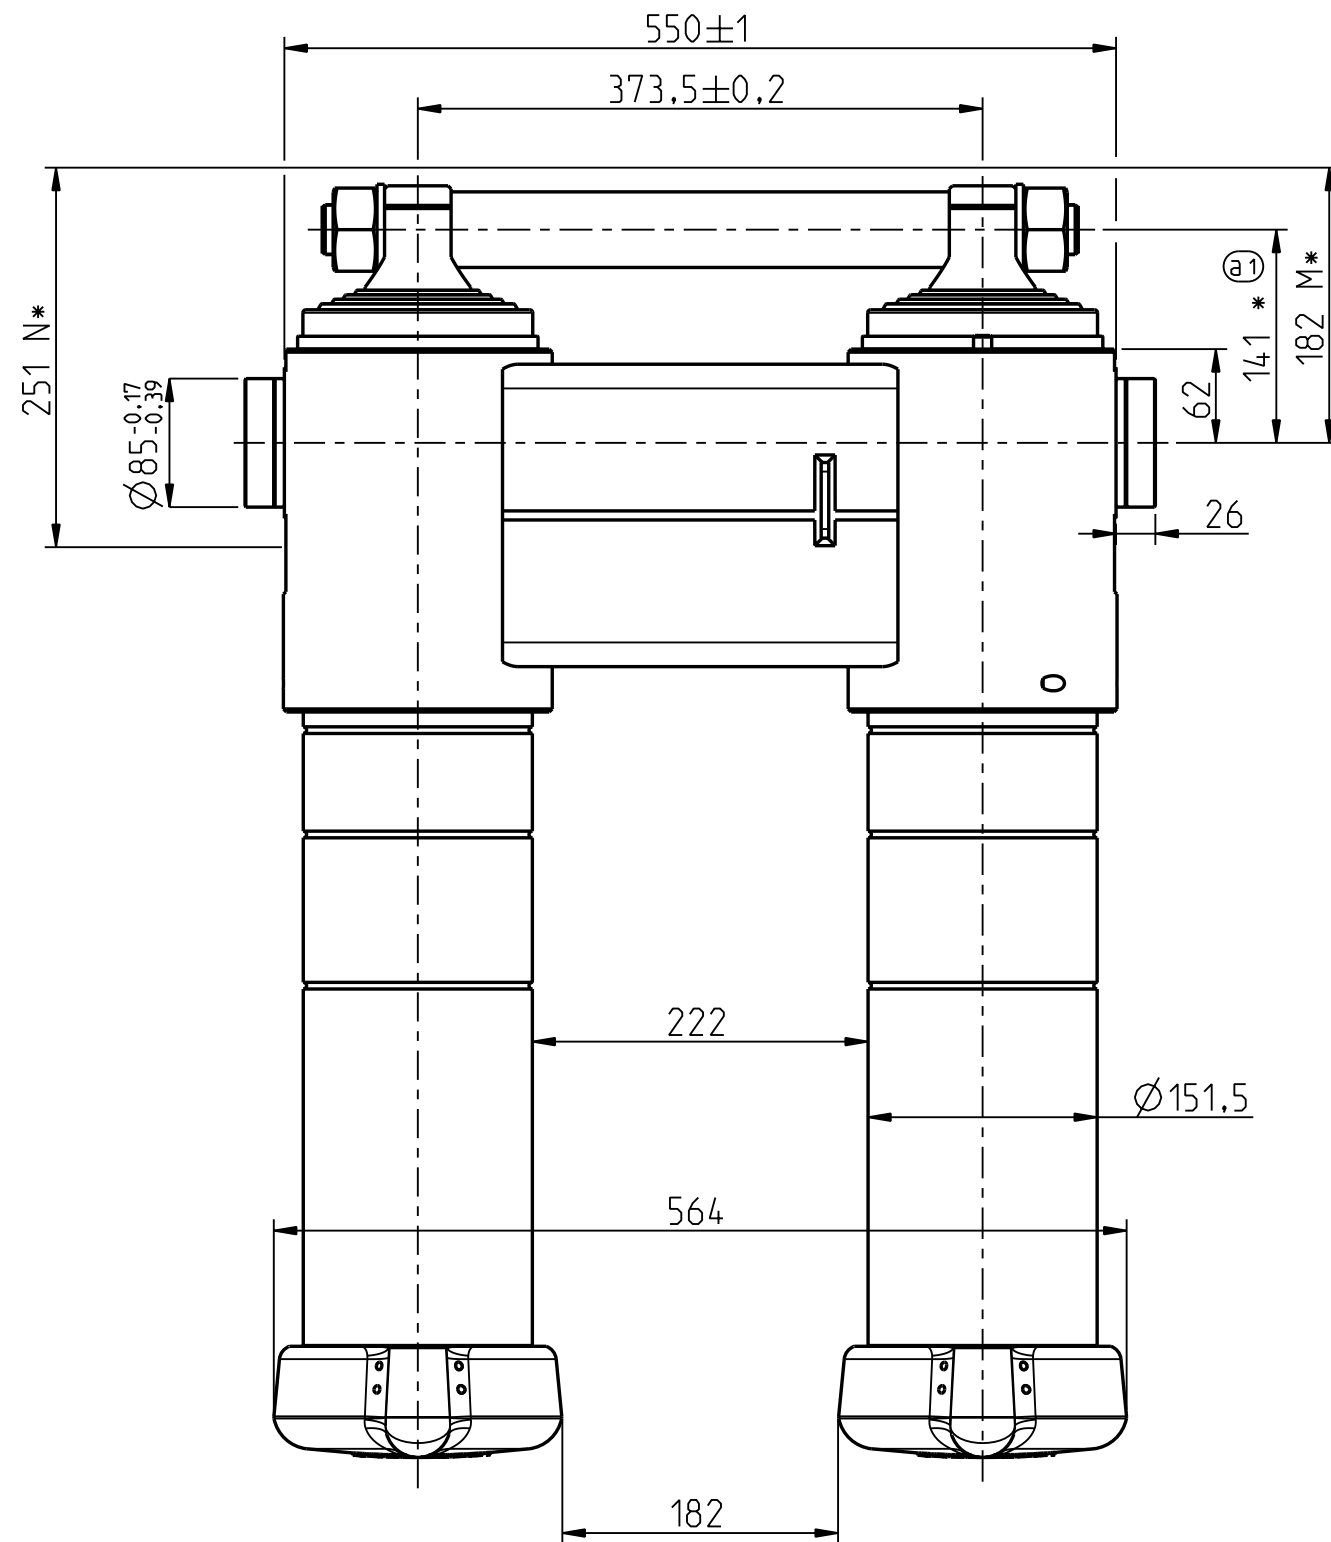


Iskutilavuus / Stroke volume 48,4 dm³.

Max. paine / pressure 250 bar (25 MPa).


Max. kuorma / load 32 t.

*Asennusvara / Recommended mounting space min. 15 mm.

Tiivistesarja / Seal kit: 340209016
TELS / TELC: 310207338

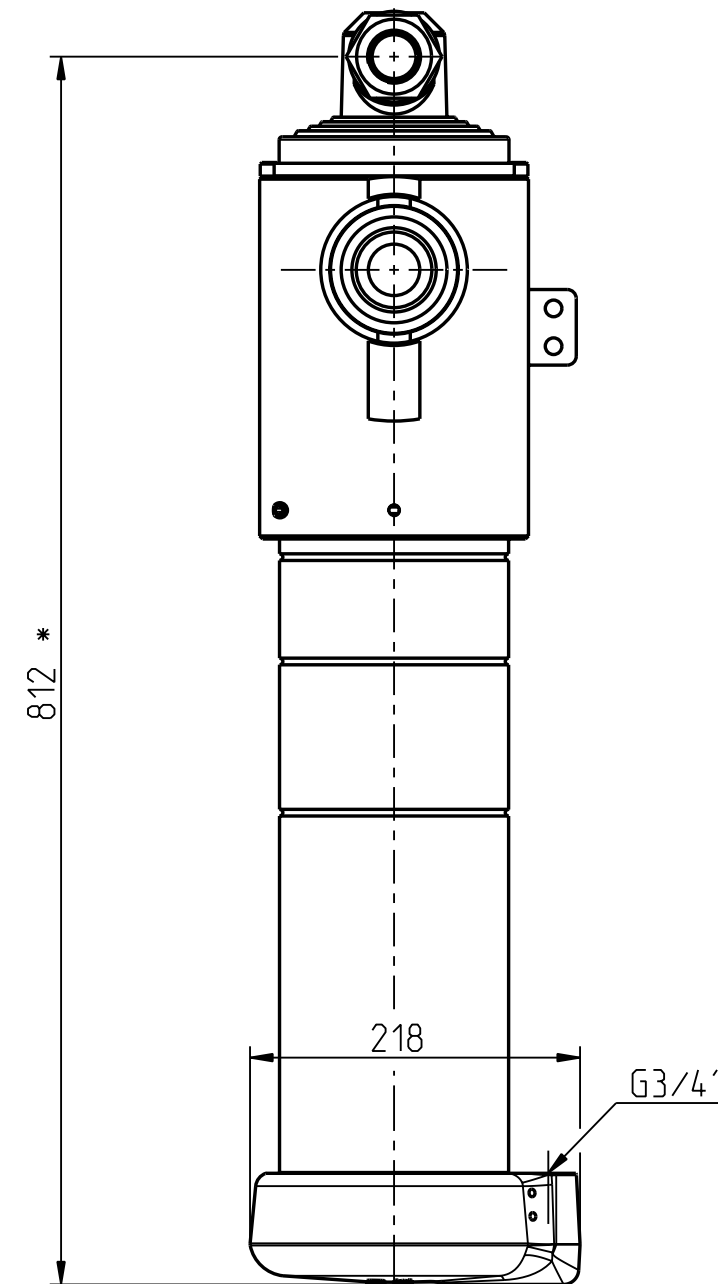

Dim.	Stroke
Ø132	580
Ø115	586
Ø100	586
Ø85	586
Ø70	588
Tot.	2926

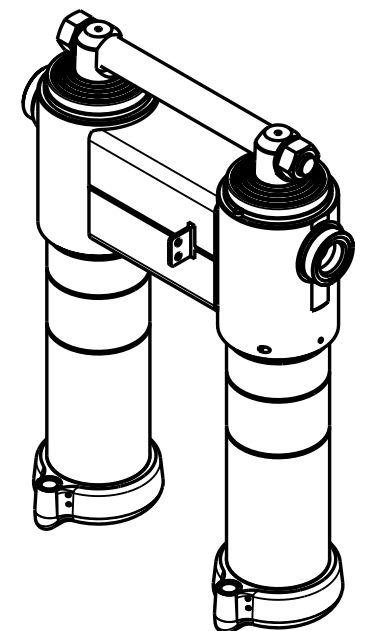

23.03.17		TDa	a1) Oli ennen/was before 151 (ryhmäkotelo vaihdettu/ram case changed).	
Date	Drawn	Revision		
	Piirt Drawn	JMe	GENERAL TOLERANCE: ISO 2768-m	Koodi Code -
	Pvm Date	20.11.09	THREAD TOLERANCE: ISO 965-3/ISO 228-1	Paino (kg) Weight 187.266
	Koko Size	A3	WELD ACCORDING TO: ISO 5817	Material STD -
		Liittyy / Belongs to		Material
		RT59		-
		Nimitys		Suhde/Scale Revision
		SRYHMÄ 152/70x2926 (DA24)		1:5 A
		Name		Piirustus no / Drawing no
		CYL GR 152/70x2926 (DA24)		310207313