

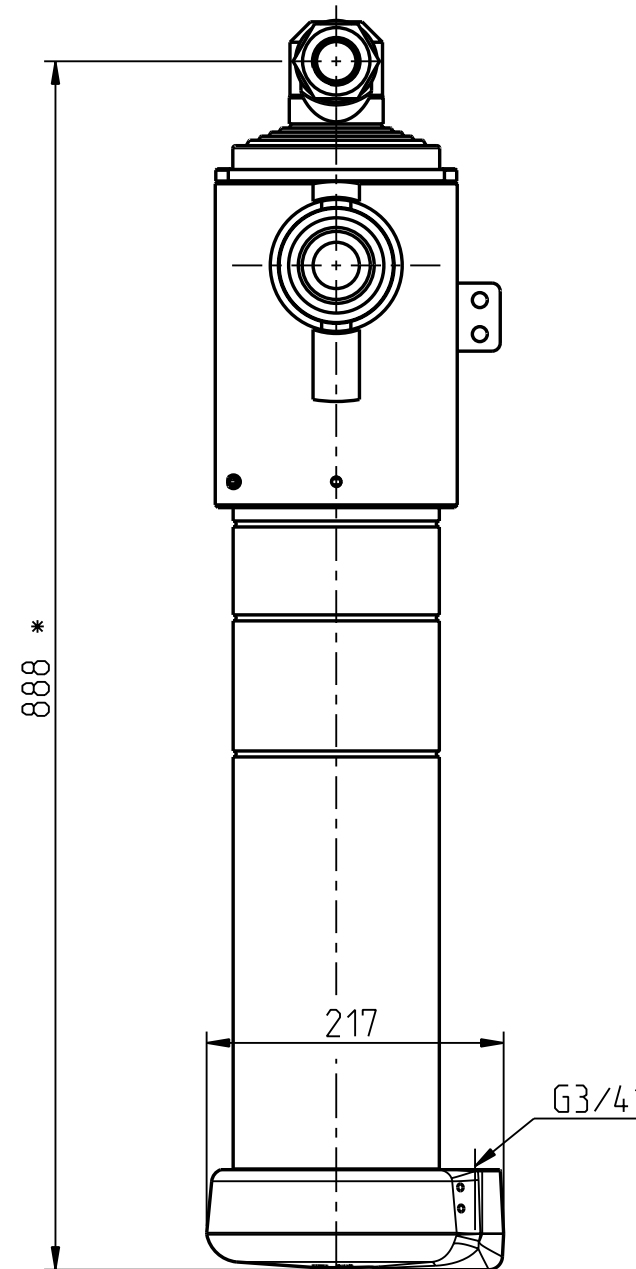


M* = Lavakiinnikkeen pohjaan/To the bottom of the body bracket.
N* = Lavakiinnikkeen pohjasta z-palkin pohjaan/
From the bottom of the body bracket to the bottom of the z-beam.

Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

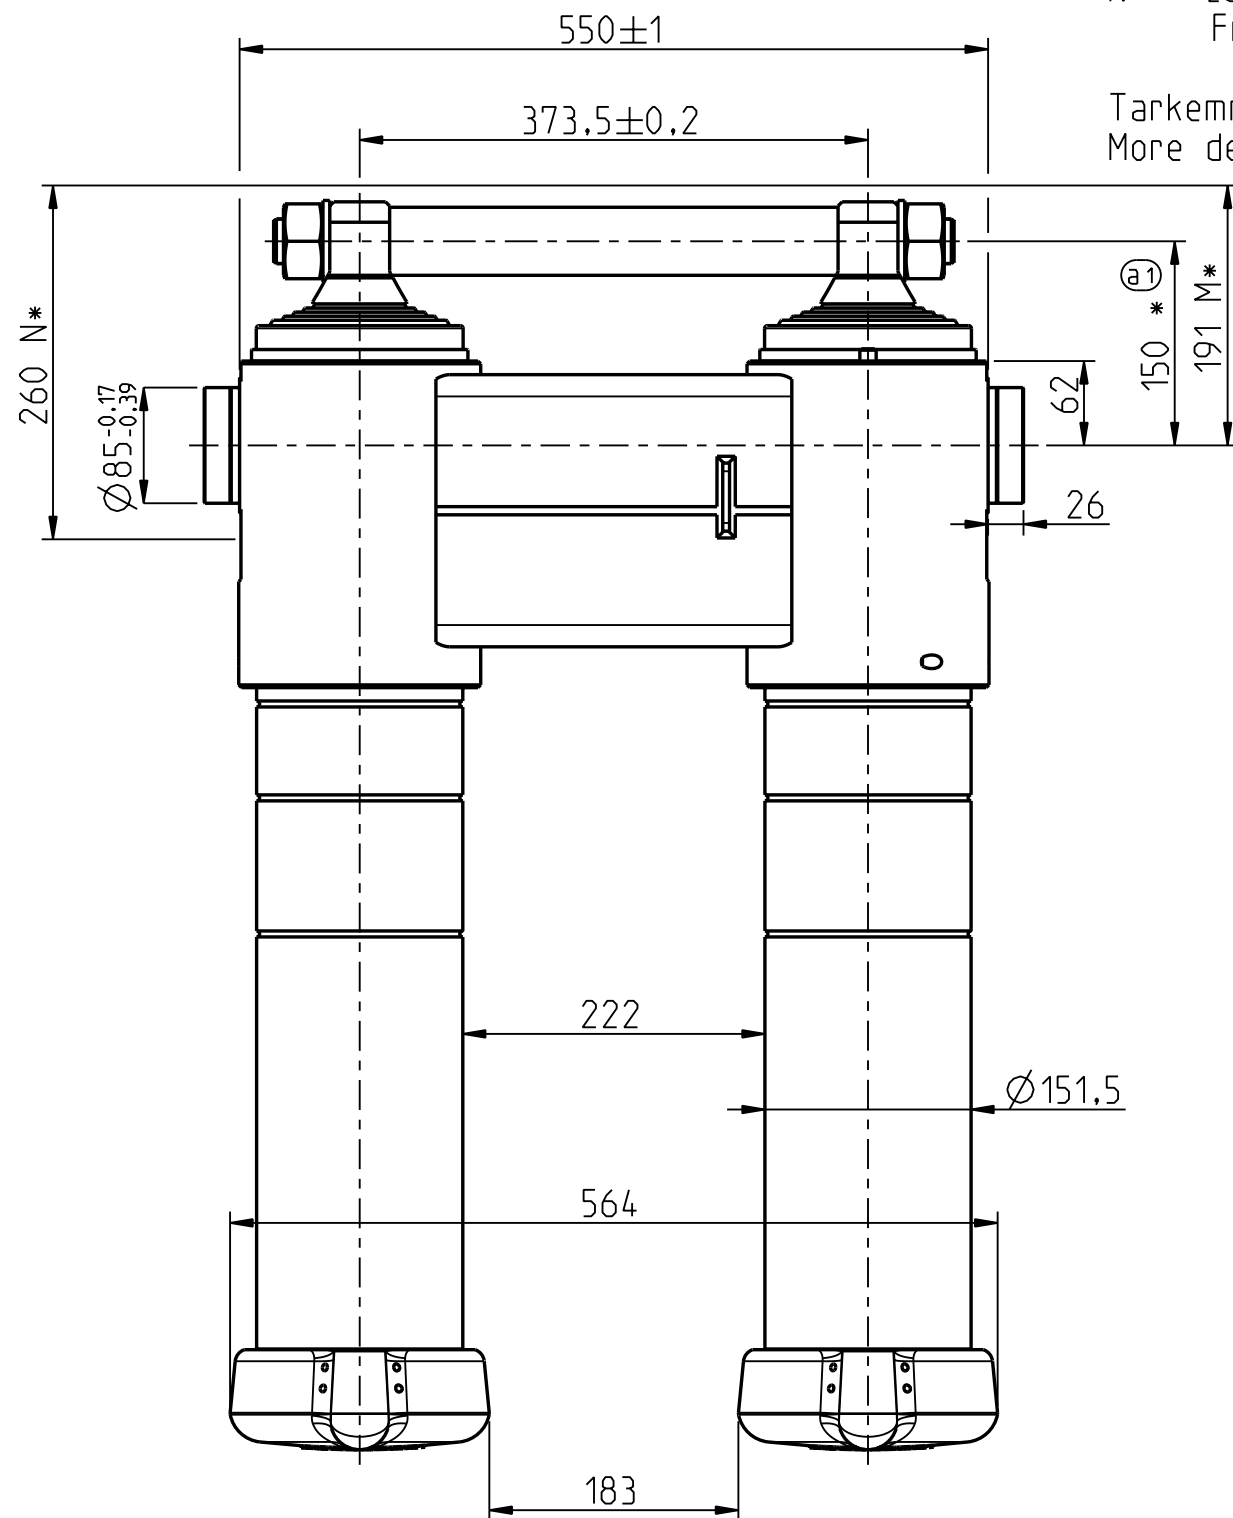

Dim.	Stroke
Ø132	647
Ø115	655
Ø100	650
Ø85	650
Ø70	650
Ø55	661
Tot.	3913

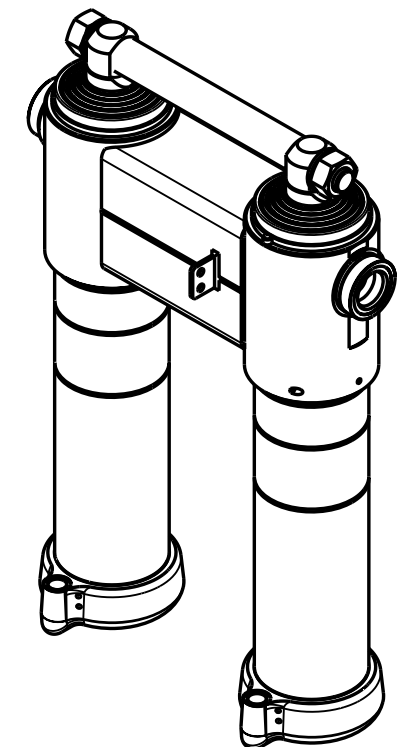

SCALE 1:10

Iskutilavuus / Stroke volume 57 dm³


Max. paine / pressure 250 bar (25 MPa)

Max. kuorma / load 32 t

* Asennusvara / Recommended mounting space min. 15 mm

Tiivistesarja / Seal kit: 340209016

TELS / TELC: 310207341

23.03.17	TDa	a1) Oli ennen/was before 160 (ryhmäkotelo vaihdettu/ram case changed).			
Date	Drawn	Revision			
		Piirtä Drawn TDa	GENERAL TOLERANCE : ISO 2768-m		Koodi Code -
		Pvm Date 29.04.10	THREAD TOLERANCE : ISO 965-3/ISO 228-1		Paino (kg) Weight 225.553
		Koko Size A3	WELD ACCORDING TO: ISO 5817		Material STD -
		Liittyy / Belongs to			Material
		RT66			-
		Nimitys			Suhde/Scale Revision
		SRYHMÄ 152/55x3913 (DA24)			9:50 A
		Name			Piirustus no / Drawing no
		CYL GR 152/55x3913 (DA24)			310207317