

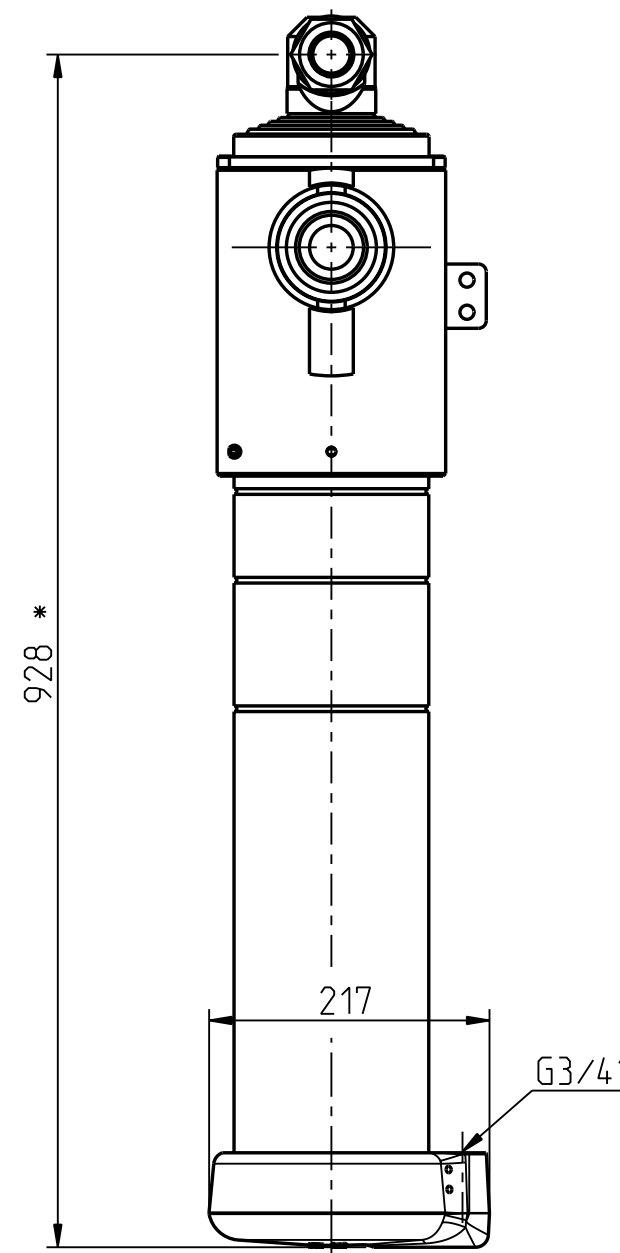


M* = Lavakiinnikkeen pohjaan/To the bottom of the body bracket.
N* = Lavakiinnikkeen pohjasta z-palkin pohjaan/
From the bottom of the body bracket to the bottom of the z-beam.

Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

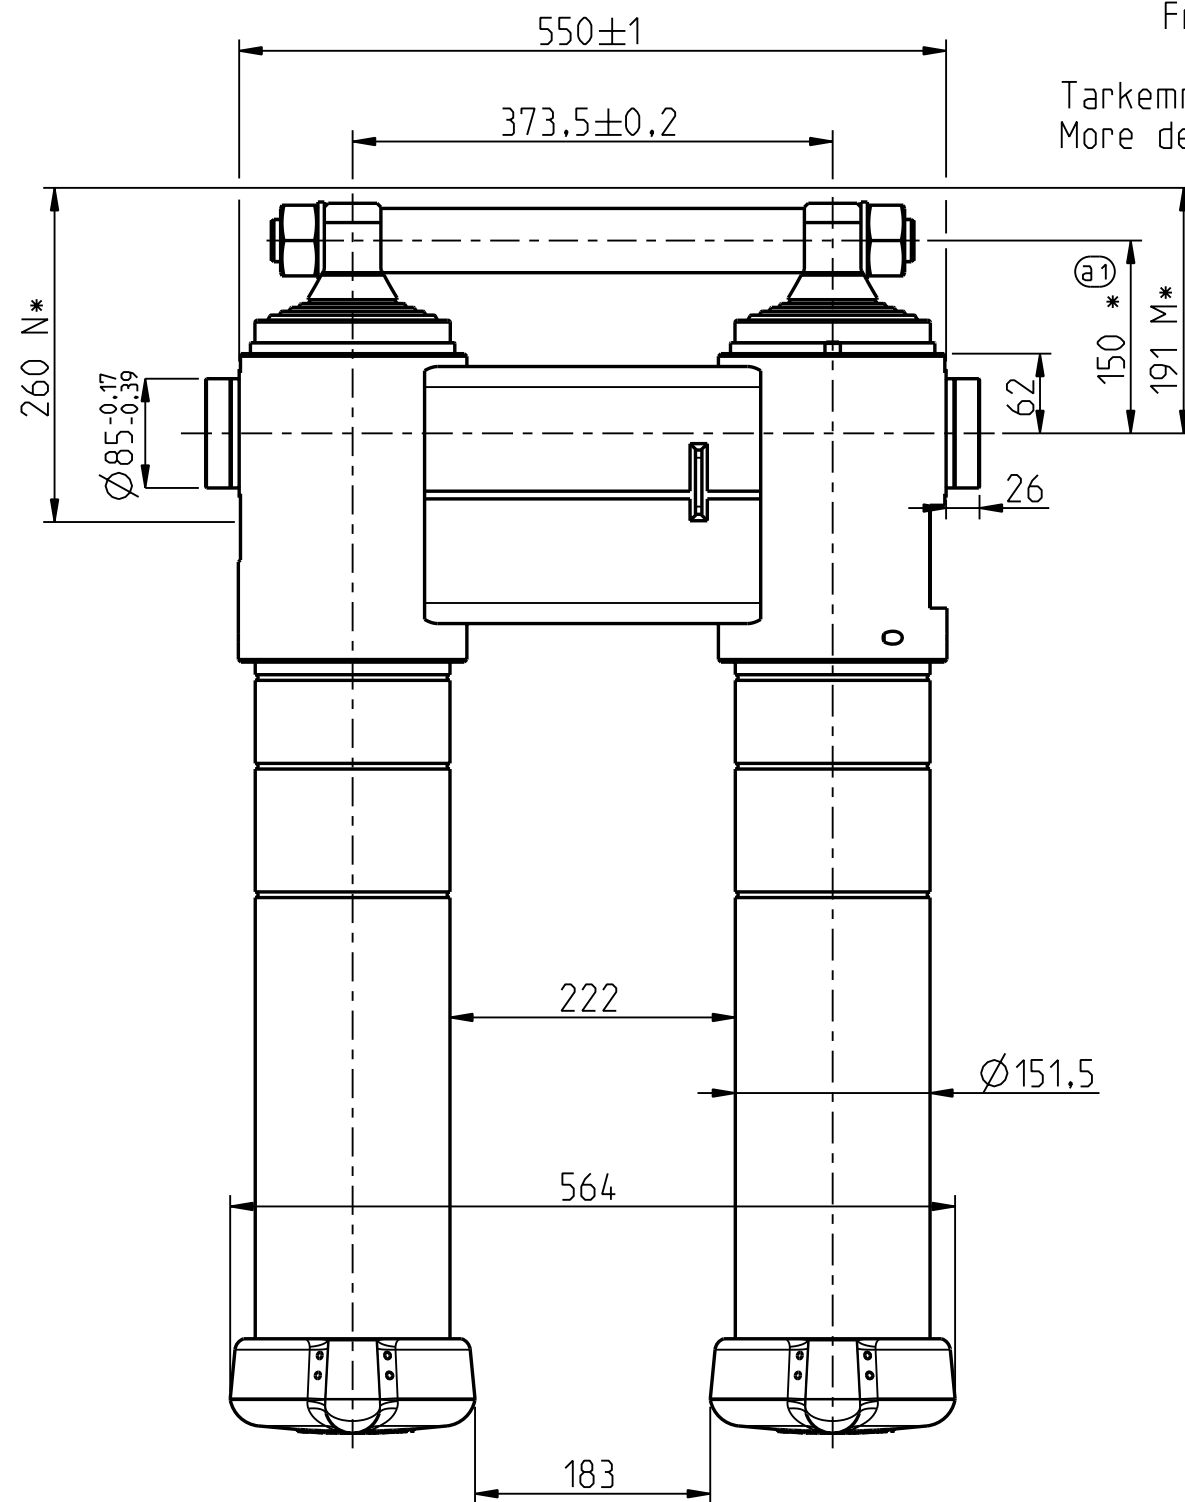

Dim.	Stroke
Ø132	686
Ø115	695
Ø100	690
Ø85	690
Ø70	690
Ø55	700
Tot.	4151

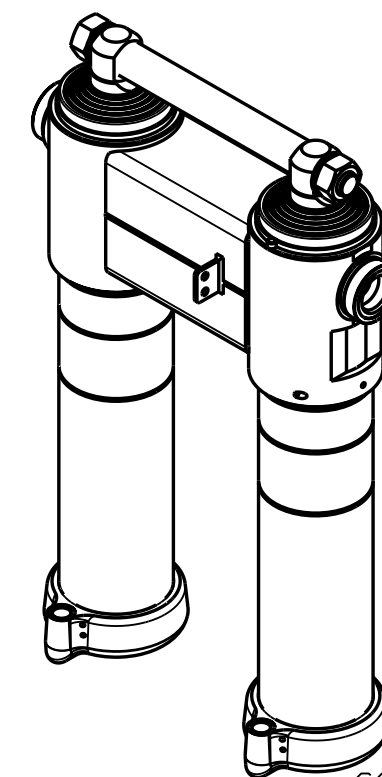

SCALE 1:10

Iskutilavuus / Stroke volume 60.6 dm³

Max. paine / pressure 250 bar (25 MPa)

Max. kuorma / load 32 t

* Asennusvara / Recommended mounting space min. 15 mm

Tiivistesarja / Seal kit: 340209016

TELS / TELC: 310207349

27.03.17	TDa	a1) Oli ennen/was before 160 (ryhmäkotelo vaihdettu/ram case changed).			
Date	Drawn	Revision			
	Piirt Drawn	TDa	GENERAL TOLERANCE: ISO 2768-m	Koodi Code	-
	Pvm Date	06.05.10	THREAD TOLERANCE: ISO 965-3/ISO 228-1	Paino (kg) Weight	234.099
	Koko Size	A3	WELD ACCORDING TO: ISO 5817	Material	STD -
		Liittyy / Belongs to		Material	
		RT70		-	
		Nimitys		Suhde/Scale	Revision
		SRYHMÄ 152/55x4151 (DA24)		17:100	A
		Name		Piirustus no / Drawing no	
		CYL GR 152/55x4151 (DA24)		310207326	