

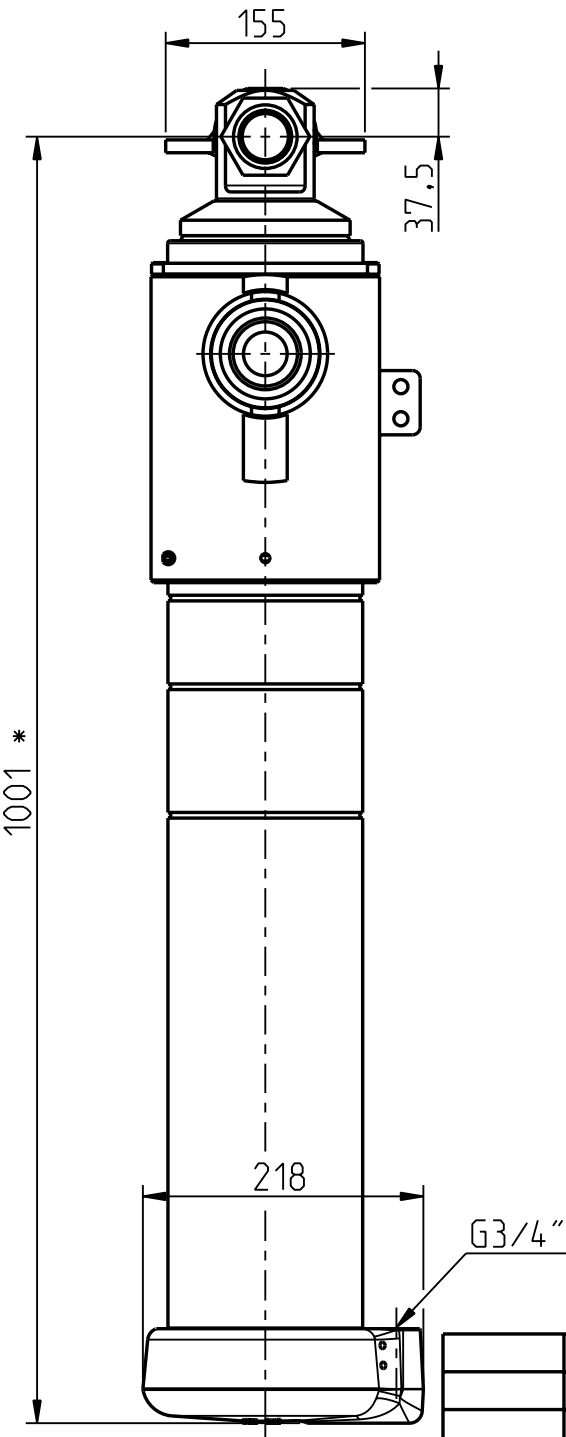


M* = Lavakiinnikkeen pohjaan/To the bottom of the body bracket.
N* = Lavakiinnikkeen pohjasta z-palkin pohjaan/
From the bottom of the body bracket to the bottom of the z-beam.

Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

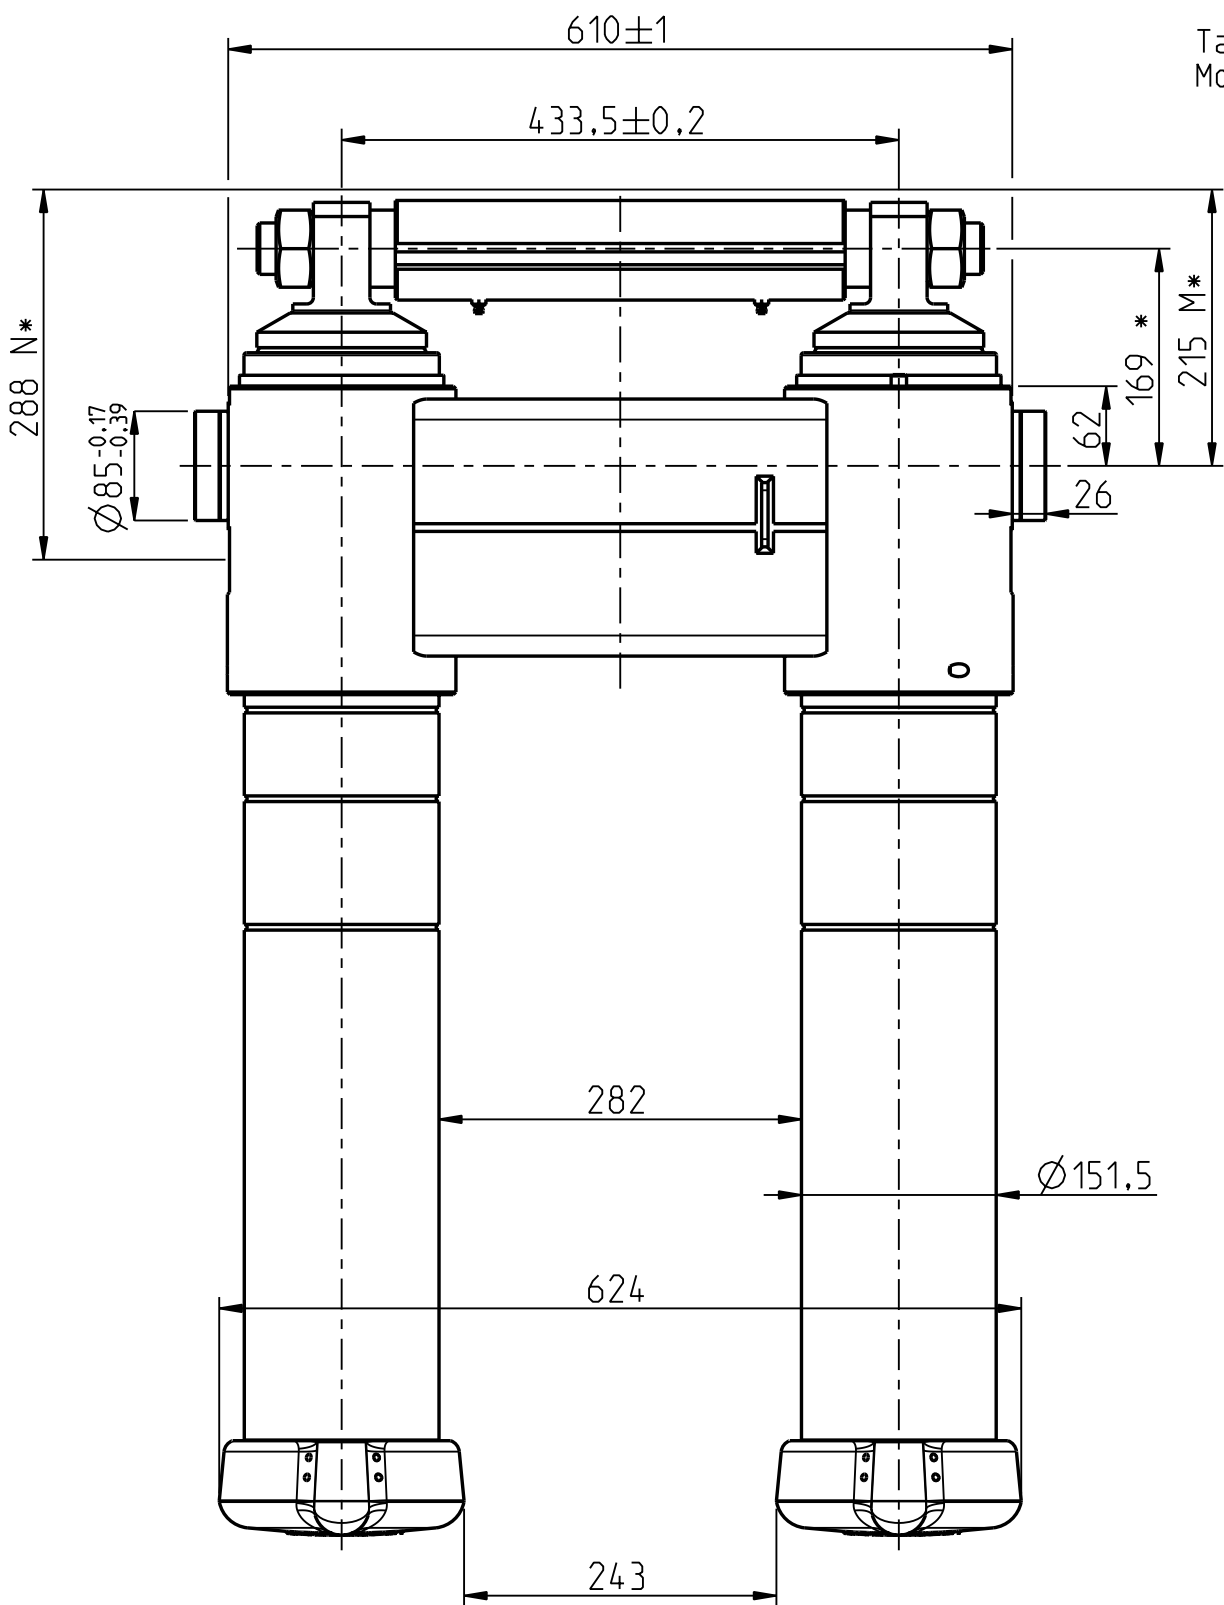

Dim.	Stroke
Ø132	742
Ø115	750
Ø100	750
Ø85	750
Ø70	750
Ø55	766
Tot.	4508

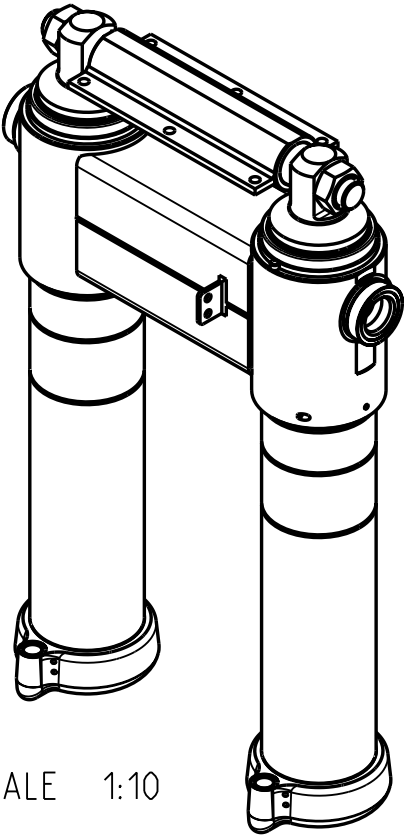

Iskutilavuus / Stroke volume 65.6 dm³

Max. paine / pressure 250 bar (25 MPa)
Max. kuorma / load 50 t

* Asennusvara / Recommended mounting space min. 15 mm

Tiivistesarja / Seal kit: 340209016

Date		Drawn	Revision	
		Piirt Drawn	TDa	GENERAL TOLERANCE: ISO 2768-m
		Pvm Date	23.12.16	THREAD TOLERANCE: ISO 965-3/ISO 228-1
		Koko Size	A3	WELD ACCORDING TO: ISO 5817
		Liittyy / Belongs to		Koodi Code
		RTW75 50t		-
		Nimitys		Paino (kg) Weight
		SRYHMÄ 152/ 55x4508 (DA24)		263.373
		Name		Material STD -
		CYL GR 152/ 55x4508 (DA24)		Material
				-
				Suhde/Scale
				17:100
				Revision
				-
				Piirustus no / Drawing no
				310208898