

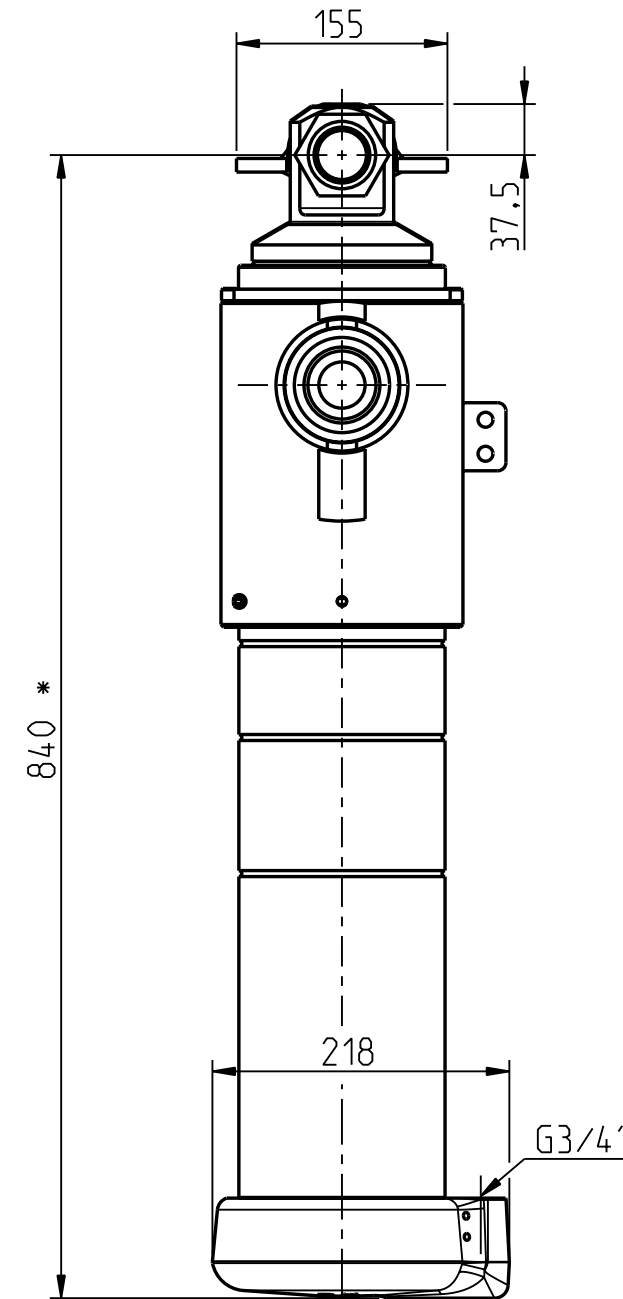


M* = Lavakiinnikkeen pohjaan/To the bottom of the body bracket.
N* = Lavakiinnikkeen pohjasta z-palkin pohjaan/
From the bottom of the body bracket to the bottom of the z-beam.

Tarkemmat asennusmitat piirustuksesta 300209200/
More detailed mounting dimension on drawing 300209200

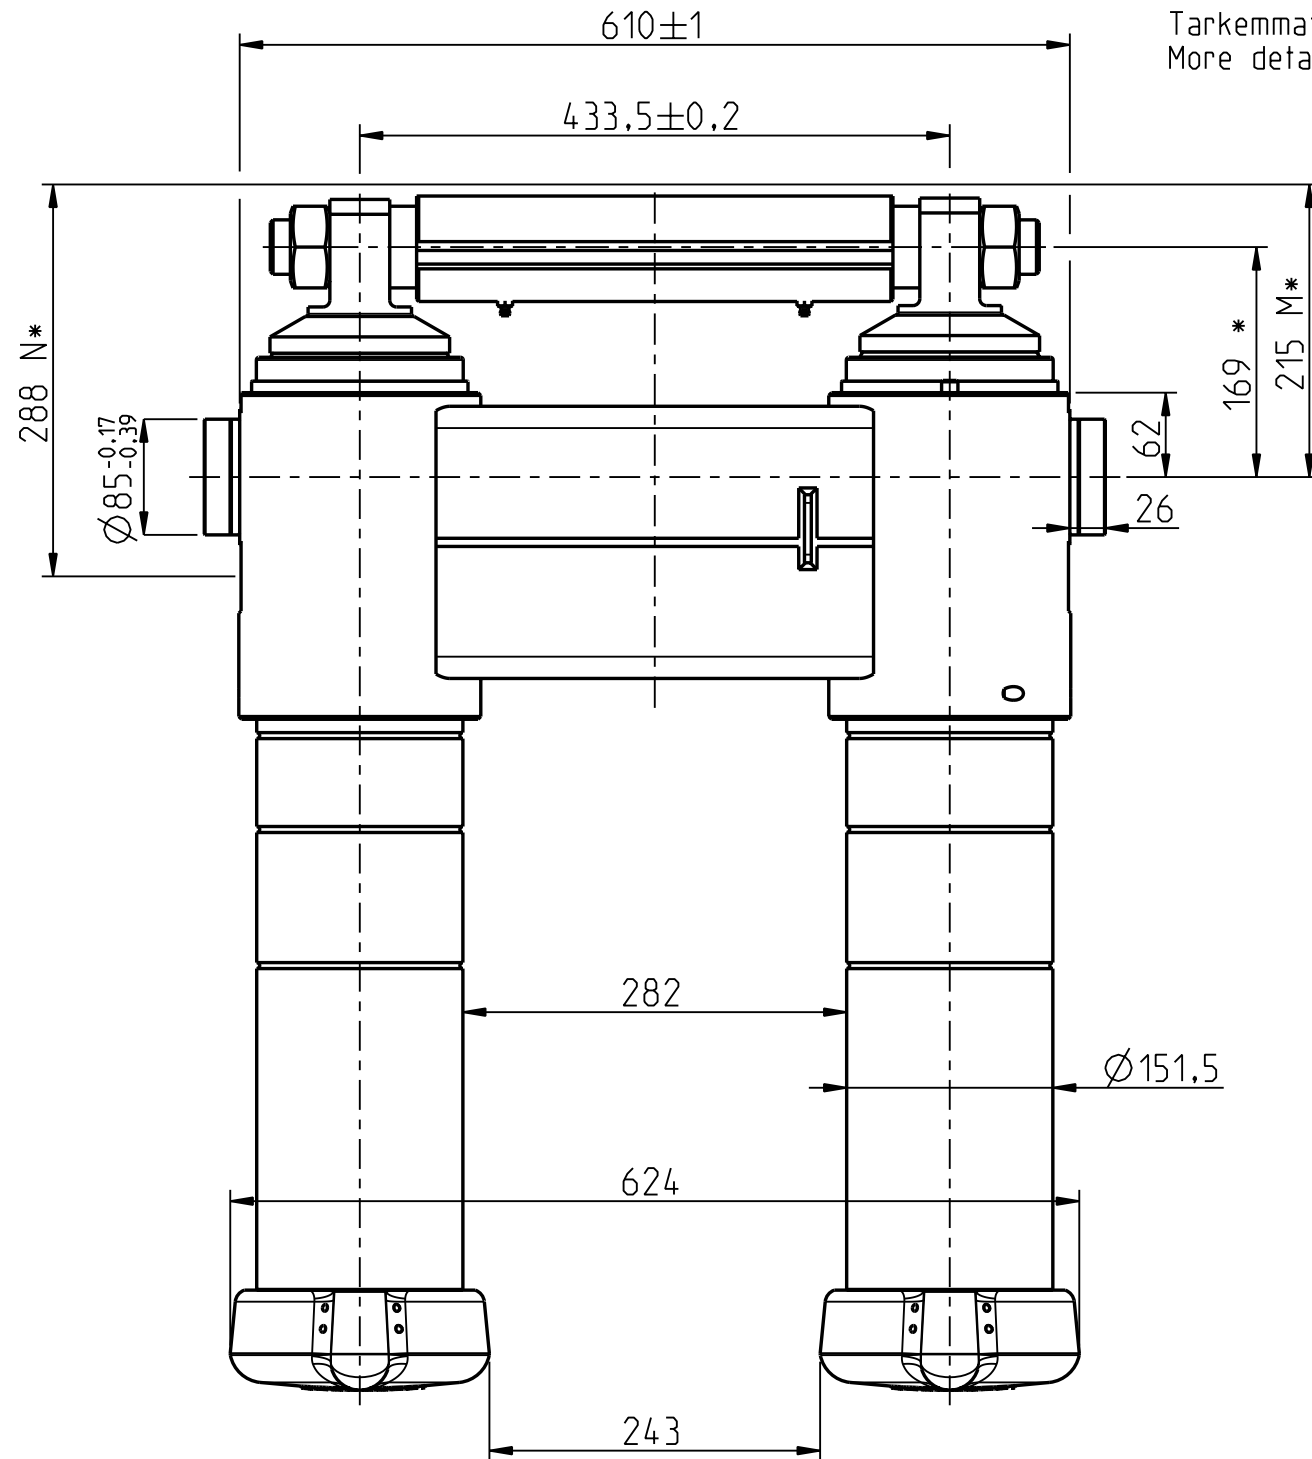

Dim.	Stroke
Ø132	580
Ø115	586
Ø100	586
Ø85	586
Ø70	613
Tot.	2951

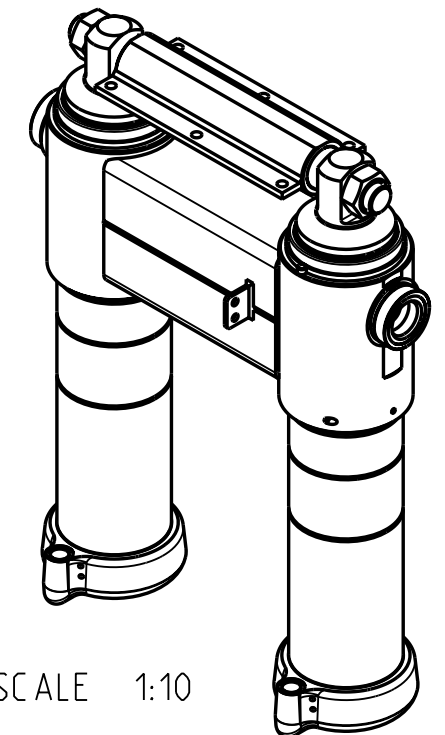

Iskutilavuus / Stroke volume 48.6 dm³

Max. paine / pressure 250 bar (25 MPa)

Max. kuorma / load 50 t

* Asennusvara / Recommended mounting space min. 15 mm

Tiivistesarja / Seal kit: 340209016

TELS / TELC: 310207339

Date	Drawn	Revision		
		Piirt Drawn	TDa	GENERAL TOLERANCE : ISO 2768-m
		Pvm Date	23.12.16	THREAD TOLERANCE : ISO 965-3/ISO 228-1
		Koko Size	A3	WELD ACCORDING TO: ISO 5817
		Liittyy / Belongs to		Material
		RTW59 50t		-
		Nimitys		Suhde/Scale
		SRYHMÄ 152/70x2951 (DA24)		9:50
		Name		Revision
		CYL GR 152/70x2951 (DA24)		-
				Piirustus no / Drawing no
				310209079